


REVISIONS			
REV.	DESCRIPTION	DATE	ECO. NO.
-	Release for production	12-Dec-18	
A	Release again	21-Dec-18	

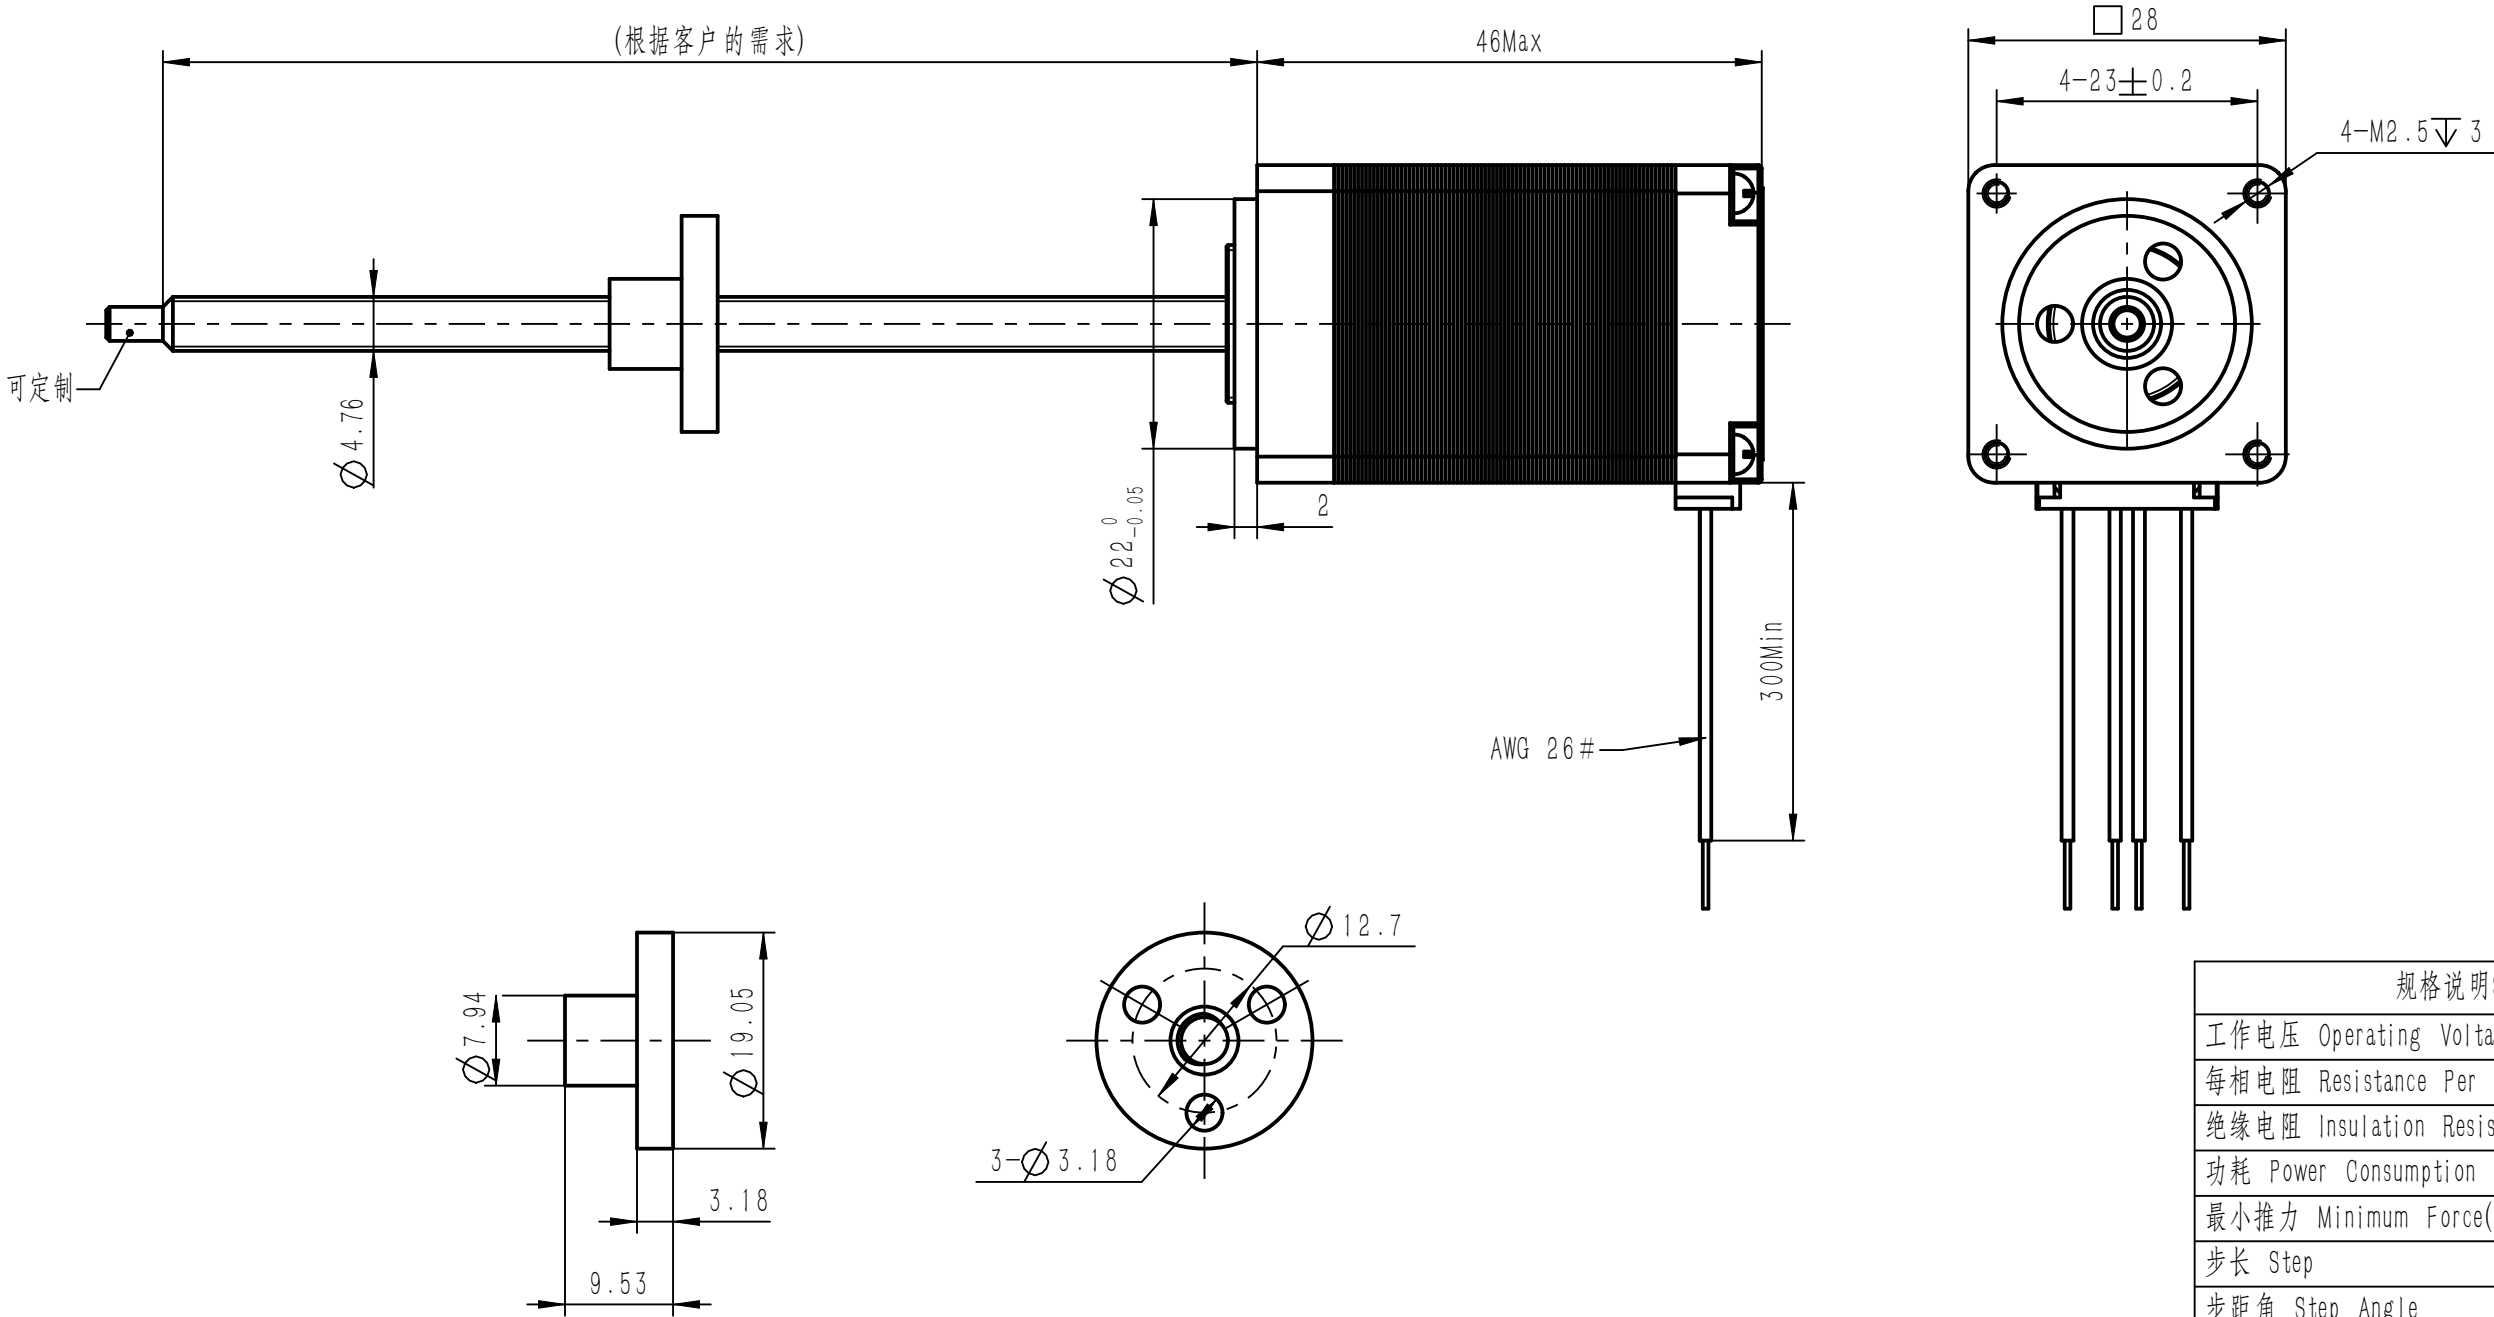

规格说明Specification	
工作电压 Operating Voltage	2.5 V
每相电阻 Resistance Per Phase	5.1 OHMS $\pm 10\%$
绝缘电阻 Insulation Resistance	20M OHMS
功耗 Power Consumption	2.45 W
最小推力 Minimum Force(300PPS)	TBD
步长 Step	0.01 mm
步距角 Step Angle	1.8°
额定电流 Rated Current	0.49 A
工作温度 Operating Temperature	-40° to +55°
环境温度 Storage Temperature	-40° to +100°
其它 Others	

描 图

描 校

底图存放

签 字


日期

客 户  
Customer

KHBM-1001

Wiring Diagram 接线图

Exciting Sequence 励磁顺序



顺时针

A+

+

-

A-

-

+

B+

-

+

B-

+

-

逆时针

STANDARD BLOCK TOLERANCES: UNLESS OTHERWISE SPECIFIED

		INCH		MM
DECIMALS:	X	$\pm 0.020$	X	$\pm 0.38$
DECIMALS:	X.X	$\pm 0.015$	X.X	$\pm 0.25$
DECIMALS:	X.XX	$\pm 0.010$	X.XX	$\pm 0.13$
DECIMALS:	X.XXX	$\pm 0.005$	X.XXX	$\pm 0.013$
DECIMALS:	X.XXXX	$\pm 0.0005$		
ANGLES:		$\pm 2^\circ$		

Drawn By

GWJ

Date

12-Dec-18



Unit mm

常州惠勒电机有限公司  
Changzhou Wheeler Motor CO., LTD  
江苏省常州市新北区薛家镇富强路8号  
No.8,Fuqiang Road, New North District,  
Changzhou, Jiangsu, 213125  
TEL: 0519-83252878, 85102562  
FAX: 0519-83252220  
EMAIL: info@wheeler.com.cn  
www.wheeler.com.cn

Scale: A4

Rev: A

Sheet 1 of 1

WHEELER™

常州惠勒电机有限公司

DWG.NO.

28EC4X-XX-XXX